




CAVARE

# 6 3/4" 7-8 5.7 HS88

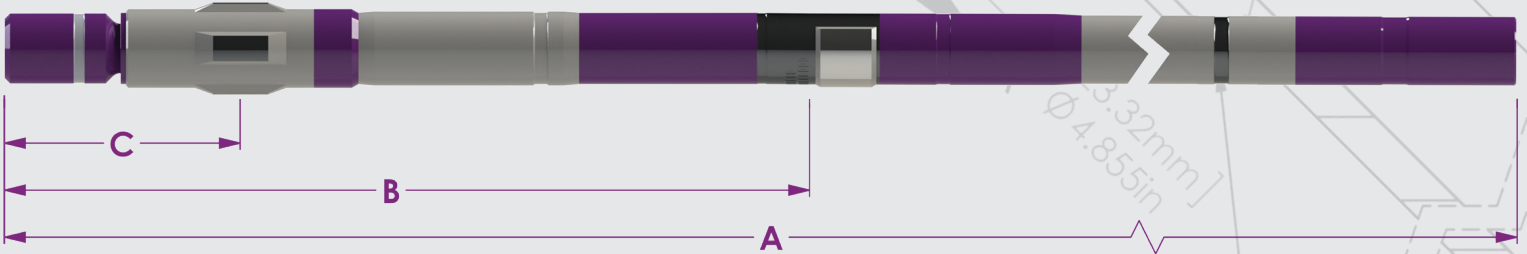

Specifications		
	Imperial	Metric
Motor OD	6 3/4"	171 mm
A = Overall Length	31.65'	9.65 m
B = Length to Bend	72"	1.83 m
C = Length to Stab Center	19"	.48 m
Weight	2887 lbs	1299 kg
Bit Size Range	7 7/8-9 7/8"	200-251 mm
Top Sub Connection	4 IF, 4 1/2 XH, 4 1/2 IF	
Bit Box Connection	4 1/2 REG	
Adjustable Angle Range	0-3	

Performance Data		
	Imperial	Metric
Flow Range	300-600 gpm	1140-2270 lpm
Rev per	.242 rev/gal	.064 rev/litre
Speed Range	300-600 rpm	
Max Diff Pressure	1645 psi	11400 kPa
Max Torque	15922 ft-lb	21587Nm
Stall Diff Pressure	1920 psi	13260 kPa
Stall Torque	20580 ft-lb	27910 Nm
Max Recommended	355 hp	265 kW
Max WOB	190,000 lbs	85,000 daN
Max Allowable Pull	190,000 lbs	85,000 daN
Max Pull to Yield	475,000 lbs	215,000 daN

